## **Fuelling products**

# **Bottom loading coupler**

F214

F214 Bayonet flange connection nonpressure control coupler



The Meggitt 3-inch bottom loading coupler is designed for the use in bulk plant system where the standard 4 inch API F228 coupler is to large. The F214 coupler mates with F429 adapter and has a unique snap - on pull - off connection action not used on the larger relatives. The coupler is available with 2, 2.5 and 3-inch female pipe threads or a 3-inch TTMA flange.

#### Notes:

- 1. Various F582 and F584 swivel assemblies will mate the F214 coupler to provide coupler rotation
- 2. Older style F214 with spring loaded sleeves may be converted to current wave washer design by ordering KITF214-102

#### **Key Features**

- Reduced sized API style design
- Snap-on, pull- off connection - one hand operation
- Full interlock safety
- Compact, low weight, rugged design
- Low pressure drop
- Capable of 8-inch center to center multi adapter instillation
- Suitable for on-truck swing

   hose delivery systems

  (seetech section)
- 200 PSI proof pressure
- Mates Meggitt F429 adapter
- Lightweight, rugged aluminum construction
- Standard seals recommended for all commercial automotive and aircraft fuels - Viton seals available




## **Fuelling products**

# **Bottom loading coupler**

F214

### **Key Dimensions**

#### F214

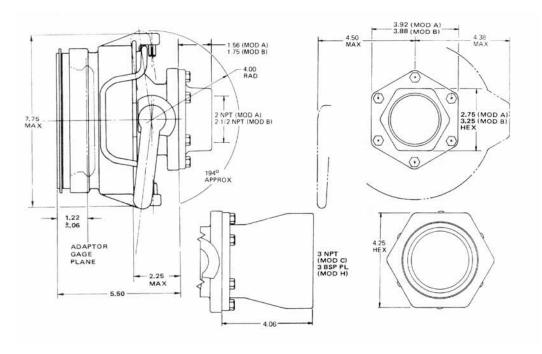

#### **Contact**

#### **Meggitt North Hollywood**

12838 Saticoy Street North Hollywood California 91605-3505 USA

Tel: (818) 765-8160 Fax: (818) 759-2194

www.meggitt.com

## **Meggitt Control Systems**