



ACTIVE COAL VENT

Mod. 198



APPLICATION

The **ACTIVE COAL VENT RIDART VALVE** is a required safety device near residential areas. Inside the valve there are active coals that allow to absorb and reduce the emission of organic pollution. Active coals are cylinders of d. 5 mm x 5/12 mm inserted inside the valve, can treat about 250 l/ hour of polluted air.


CHEMICAL SUITABILITY

- Standard model is for traditional fuel without additives and compatible chemical products.



CE Ex II 2 G

CODE	094465	094466
BODY	BRASS	BRASS
DETENTION COAL NET	BRASS	BRASS
A	110	120
DN1	1" 1/2 BSPP F	2" BSPP F
FLOW	1400 lt/min	1900 lt/min
ACTIVE COAL SPARES PART	094465-2	094465-3
WORKING TEMPERATURE	-20°C + 60°C	-20°C + 60°C

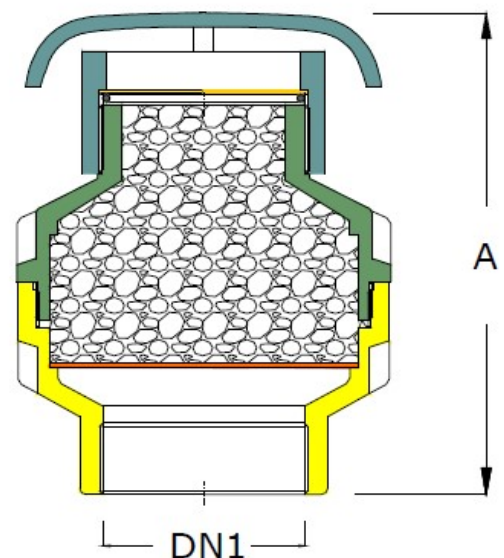

INSTALLATION

- Active coal vent valve is only for vertical installation .
- For correct installation follow the Directives and product User Manual.
- Contact our technical department for custom application or maintenance by email to: quality@ridart.it
- Product Certification, Declaration of Conformity and User Manuals are available on: www.ridart.it/support.

MAINTENANCE

- Periodically check the valve is necessary to remove possible dirty, nests or insects.
- Always replace the product after fire or deflagration.
- In case of tampering warranty expires and safety protection is not guaranteed.

RIDART s.r.l. via Adua, 17 - 21045 Gazzada Schianno (VA) ITALY P.IVA/C.F. IT 01454770122
www.ridart.it info@ridart.it +39 0332 463301

Product Certification, Declaration of Conformity, User Manual and Testing on: www.ridart.it/support

The Data and Images are not binding. We reserve the right to make changes without notice. Pressure & Flow Tolerances ±20%.